

singlepartkits

CTM DEBRIE offers kits allowing clients to transform existing tables purchased from other companies to be more similar to the products we offer, or to build a table tailored to their own design.



Horizontal counter



Kit of manual winder - unwinder with its roller guide


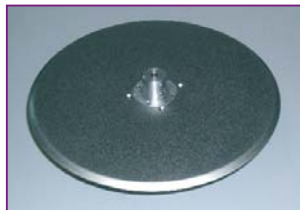


Plate 600m or 300m




Lyre

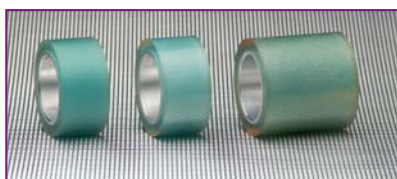


PTR for printers, tables and telecinemas

singlepartresale

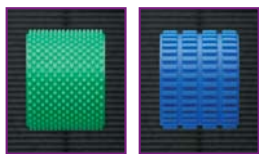

TECHNIFORM

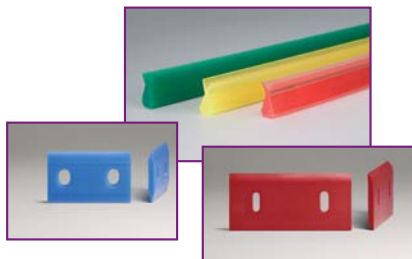

film storage container

Made from prime and inert polypropylene and designed specifically for long term storage and preservation. With regard to the competition, these Film Storage Containers reflect a sharp understanding of the causes of the ageing and the deterioration of the film acetate or nitrate. Film Storage Container are available in various size and colours, for 16mm (120m, 240m, 360m, 600m) and for 35mm (300m, 360m, 600m, 900m); also we can offer cores 16 and 35mm and stabilizers for transport.



shrinkage gauge

The shrinkage gauge was designed, based on an earlier system, especially for laboratories and film archives as well as for everybody handling shrunken films. This instrument allows for direct reading of the percentage of shrinkage with a digital gauge. Due to the well thought out design, measuring of the actual shrinkage with absolute accuracy is easy, even without prior experience in handling of archival films. 16mm as well as 35mm film formats.



cube light yellow 24vcc 125ma

- LED cluster in a range of colours
- Smooth multi-turn adjustment potentiometer
- 3M directional film can be installed for polarisation and light direction
- Low current consumption, 6mA at zero intensity, 125mA at max intensity
- Wall mounting plate supplied, no special installation tooling is required
- Mean Time Between Failure = 100,000 Hours



splicer & cleaver series

S model 16 or 35 mm semi-automatic and manual splicer

Film cement Splicers easy to operate, providing the end-users with 16 or 35 mm splices for film or microfilm with a very high sharpness, steadiness and toughness.

film splicer (adhesive tape)

film cleaver

Film Cleaver Mk. "V" (variable) produces an exact wedge-cut to edit film without any loss of image field. The Film can be invisibly re-cemented.

Film type	DIN	Wedge-cut
Super 8 Film	DIN - A	1,05 mm
9,5mm Film	DIN - B	1,00 mm
Super 9,5mm	DIN - B	1,00 mm
16mm Negativ Single Filmband montage	DIN-A	0,80 / 0,85 / 0,90 mm
16mm Negativ Single Filmband montage	DIN - B	0,80 / 0,85mm
16mm Negativ Chessboard montage	A - B Montage	1,05mm
16mm Positiv Single Filmband montage	(Reversal) DIN A	0,80 / 0,85 / 0,90 / 1,05mm
16mm Positiv Single Filmband montage	(Reversal) DIN B	0,80 / 0,85mm
16mm Positiv Single Filmband montage	(copy) DIN A	1,05mm
35mm Negativ	DIN-B	1,10 / 1,15 / 1,20mm
35mm Negativ Cinemascope (CS)		0,80mm
35mm Positiv	DIN-B	1,10 / 1,15 / 1,20mm

film joiner

The Film Joiner is very handy, it measures only 105 x 55 x 55 millimeters and requires very little space on the splicing table. The baseplate can be changed without tools and are available for these formats: 35mm Reversal / 35mm Negative / 16mm / Super 8 / 2 x Super 8 (DS 410) / 9,5mm

film cleaver and splicer (adhesive tape)

ultrasonic film splicer model 3001

The Model 3001 adapts to all major motion picture microfilm formats- Super 8 to 35mm (with changeable film register plates).

Size: 8" x 12 .5" x 6.5" (20.3 x 31.8 x 16.5cm) Weight 16 lbs. (7.30 Kg).

